


MRG-C 알루미늄합금제
MRGS-C 오스테인레세

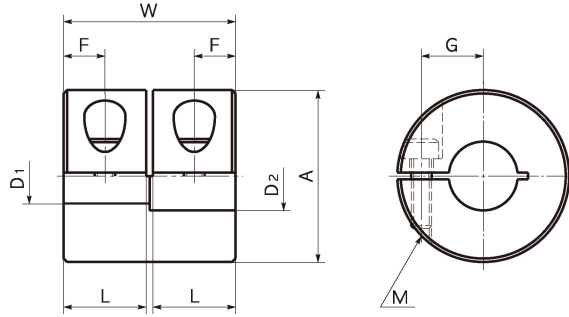

|규격·성능

단위 : mm

품번 	A	W	L	F	G	M	나사체결토크 (N·m)	표준축구멍지름 D ₁ ×D ₂ 													
								5	6	8	10	12	14	15	16	18	19	20	25	28	30
MRG-16C	16	16	7.5	3.75	5	M2.5	1														
MRG-20C	20	20	9.5	4.75	6.5	M2.5	1														
MRG-25C	25	25	12	6	9	M3	1.5														
MRG-32C	32	32	15.5	7.75	11	M4	2.5														
MRG-40C	40	40	19.5	9.5	14	M5	4														
MRG-50C	50	50	24.4	12	18	M6	8														
MRG-65C	65	65	31.9	16	23	M8	16														
MRGS-16C	16	16	7.5	3.75	5	M2.5	1														
MRGS-20C	20	20	9.5	4.75	6.5	M2.5	1														
MRGS-25C	25	25	12	6	9	M3	1.5														
MRGS-32C	32	32	15.5	7.75	11	M4	2.5														
MRGS-40C	40	40	19.5	9.5	14	M5	4														
MRGS-50C	50	50	24.4	12	18	M6	8														
MRGS-65C	65	65	31.9	16	23	M8	16														

- 전상품에 육각렌치머리볼트가 포함되어 있습니다.
- 적용축지름의 추천 치수허용차는 h6 및 h7입니다.
- D컷축에 장착할 경우, 축의 D컷면 위치에 주의 바랍니다.

품번	최대축구멍지름 (mm)	상용토크* (N·m)	최대토크* (N·m)	최고회전수 (min ⁻¹)	관성모멘트** (kg·m ²)	질량** (g)
MRG-16C	6	1	2	39000	3.0×10 ⁻⁷	8.3
MRG-20C	8	2.5	5	31000	8.7×10 ⁻⁷	15
MRG-25C	10	4.5	9	25000	2.7×10 ⁻⁶	29
MRG-32C	14	10	20	19000	7.1×10 ⁻⁶	51
MRG-40C	18	20	40	15000	2.4×10 ⁻⁵	104
MRG-50C	24	25	50	12000	7.5×10 ⁻⁵	197
MRG-65C	30	35	70	9000	2.8×10 ⁻⁴	446
MRGS-16C	6	0.3	0.6	39000	8.0×10 ⁻⁷	22
MRGS-20C	8	0.5	1	31000	2.4×10 ⁻⁶	41
MRGS-25C	10	1	2	25000	7.3×10 ⁻⁶	80
MRGS-32C	14	2	4	19000	2.5×10 ⁻⁵	160
MRGS-40C	18	3	6	15000	7.0×10 ⁻⁵	297
MRGS-50C	24	4.5	9	12000	2.1×10 ⁻⁴	563
MRGS-65C	30	7	14	9000	8.1×10 ⁻⁴	1270

* 부하변동에 따른 상용토크, 최대토크의 보정은 필요하지 않습니다.

** 최대 축 구멍지름에서의 값입니다.

• 품번지정

MRG-32C-12×14

◀1

◀2