


MRG-C 알루미늄합금제

MRGS-C 올스테인레스제

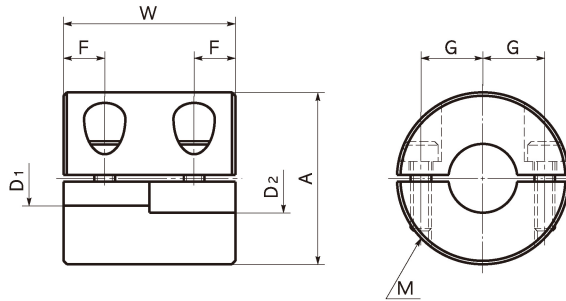

|규격·성능

단위 : mm

품번 ◀1	A	W	F	G	M	나사체결 토크 (N·m)	표준축구멍지름 D1×D2 ◀2													
							5	6	8	10	12	14	15	16	18	19	20	25	28	30
MRG-16W	16	16	4	5	M2.5	1	●	●												
MRG-20W	20	20	5	6.5	M2.5	1		●	●											
MRG-25W	25	25	6	9	M3	1.5			●	●										
MRG-32W	32	32	8	11	M4	2.5				●	●	●								
MRG-40W	40	40	9.5	14	M5	4							●	●	●					
MRG-50W	50	50	12	18	M6	8										●	●			
MRG-65W	65	65	16	23	M8	16												●	●	●
MRGS-16W	16	16	4	5	M2.5	1	●	●												
MRGS-20W	20	20	5	6.5	M2.5	1		●	●											
MRGS-25W	25	25	6	9	M3	1.5			●	●										
MRGS-32W	32	32	8	11	M4	2.5				●	●	●								
MRGS-40W	40	40	9.5	14	M5	4							●	●	●					
MRGS-50W	50	50	12	18	M6	8										●	●			
MRGS-65W	65	65	16	23	M8	16												●	●	●

- 전상품에 육각렌치볼트가 포함되어 있습니다.
- 적용축지름의 추천 치수허용차는 h6 및 h7입니다.

품번	최대축구멍지름 (mm)	상용토크* (N·m)	최대토크* (N·m)	최고회전수 (min ⁻¹)	관성모멘트** (kg·m ²)	질량** (g)
MRG-16W	6	1	2	39000	3.2×10 ⁻⁷	8.8
MRG-20W	8	2.5	5	31000	8.7×10 ⁻⁷	15
MRG-25W	10	4.5	9	25000	2.7×10 ⁻⁶	29
MRG-32W	14	10	20	19000	9.3×10 ⁻⁶	61
MRG-40W	18	20	40	15000	2.3×10 ⁻⁵	99
MRG-50W	24	25	50	12000	7.1×10 ⁻⁵	189
MRG-65W	30	35	70	9000	2.7×10 ⁻⁴	428
MRGS-16W	6	0.3	0.6	39000	8.2×10 ⁻⁷	22
MRGS-20W	8	0.5	1	31000	2.4×10 ⁻⁶	41
MRGS-25W	10	1	2	25000	7.3×10 ⁻⁶	80
MRGS-32W	14	2	4	19000	2.5×10 ⁻⁵	160
MRGS-40W	18	3	6	15000	6.7×10 ⁻⁵	285
MRGS-50W	24	4.5	9	12000	2.0×10 ⁻⁴	541
MRGS-65W	30	7	14	9000	7.7×10 ⁻⁴	1220

* 부하변동에 따른 상용토크, 최대토크의 보정은 필요하지 않습니다.

** 최대 축 구멍지름에서의 값입니다.

• 품번지정

MRGS-25W- 8×8

