





JCX-Series(Aluminum Body)

JCX-40(18H)

JCX-40L(18H) JCX-40C(18H) JCX-40R(18H)




Model	JCX-40L(18H)	JCX-40R(18H)	JCX-40C(18H)
Surface Size	40 x 40 mm		
Position of Micrometer Head	Left	Right	Center
Travel Range	± 6.5 mm		
Minimum Reading of Micrometer	10 μ m		
Guide Type	Crossed-Roller Guide		
Load Capacity	3kgf		
Parallelism	30 μ m		
Driving Parallelism	10 μ m		
Weight	0.13 kg	0.13 kg	0.12 kg
Material	Aluminum		
Finish Treatment	Black Anodizing		

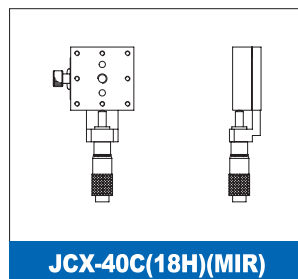


JCX-40C(18H)(MIR)


JCX-40C(18H)

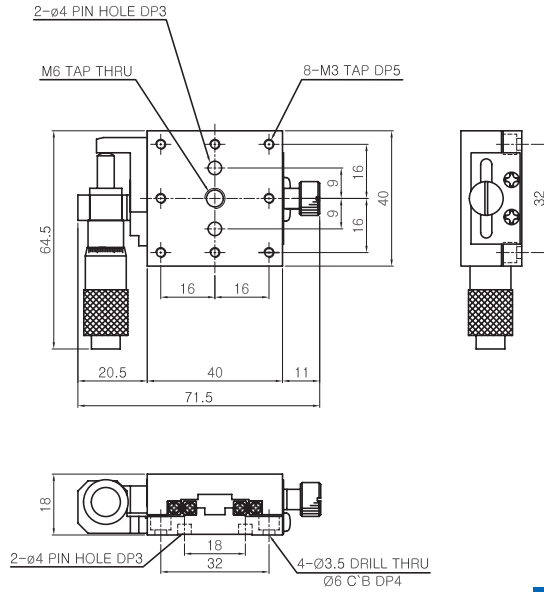


JCX-40L(18H)

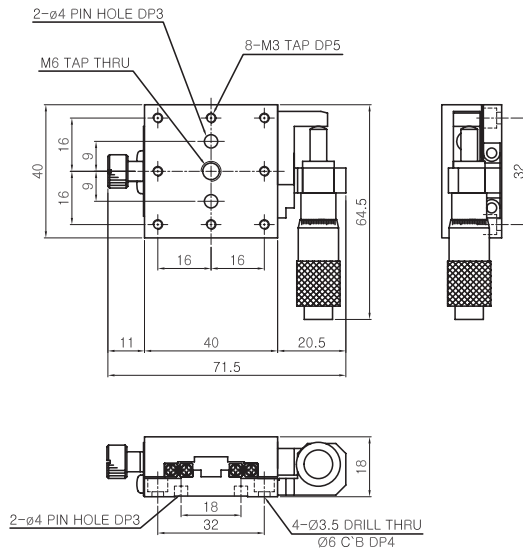

JCX-40R(18H)

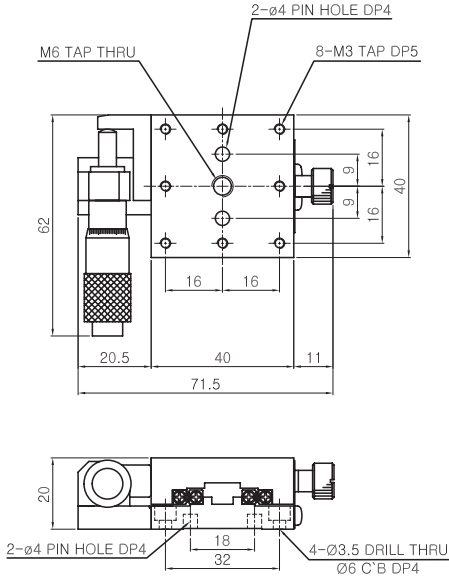

JCX-40L

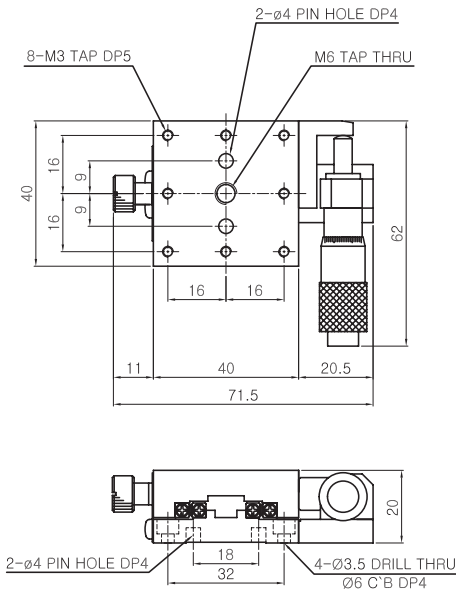

JCX-40R


JCXY-Series(Aluminum Body)

JCXY-40


JCXY-40L

JCXY-40C


JCXY-40R

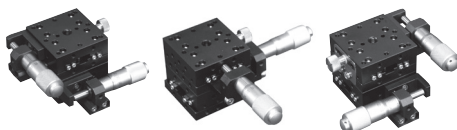


Model	JCXY-40L	JCXY-40R	JCXY-40C
Surface Size	40 x 40 mm		
Position of Micrometer Head	Left	Right	Center
Travel Range	± 6.5 mm		
Minimum Reading of Micrometer	10 μ m		
Guide Type	Crossed-Roller Guide		
Load Capacity	2.8kgf		
Parallelism	60 μ m		
Driving Parallelism	20 μ m		
Orthogonality	10 μ m		
Weight	0.28 kg	0.28 kg	0.26 kg
Material	Aluminum		
Finish Treatment	Black Anodizing		

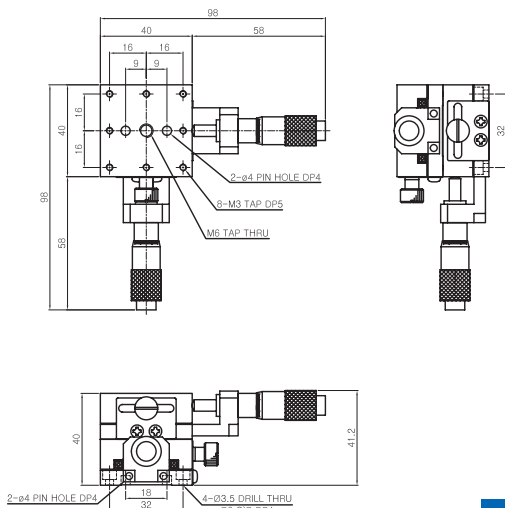

JCXY-40C

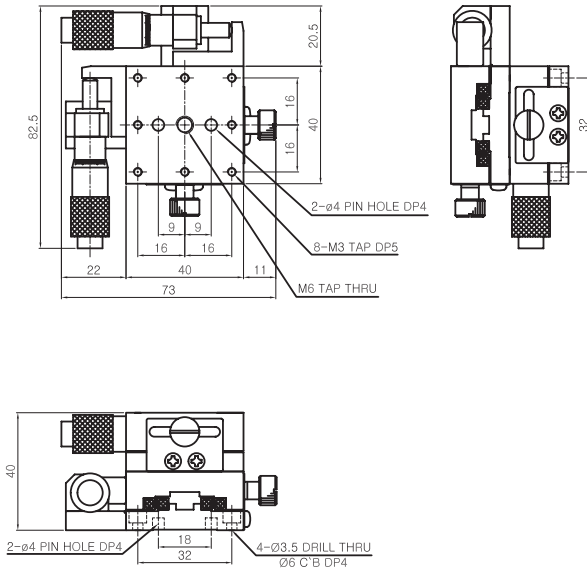

JCXY-40L

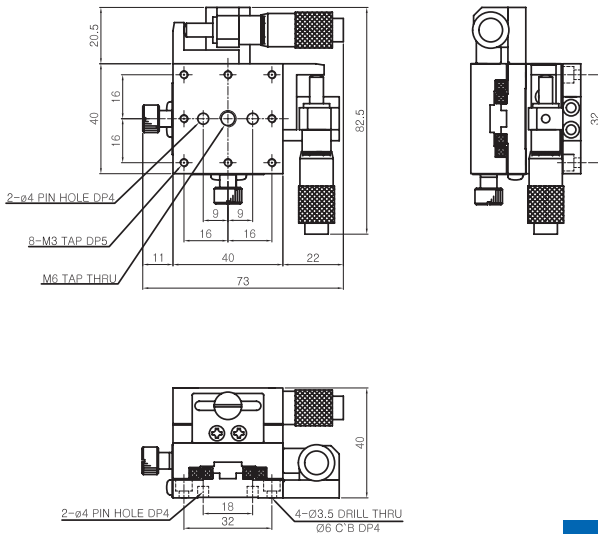

JCXY-40R


Slim JCY-Series(Aluminum Body)

JCXY-40-S


JCXY-40LS

JCXY-40CS


JCXY-40RS

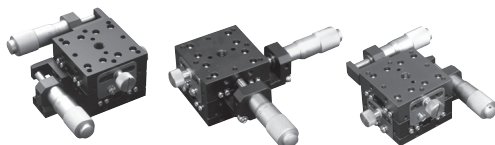


Model	JCXY-40LS	JCXY-40RS	JCXY-40CS
Surface Size	40 x 40 mm		
Position of Micrometer Head	Left	Right	Center
Travel Range	±6.5 mm		
Minimum Reading of Micrometer	10μm		
Guide Type	Crossed-Roller Guide		
Load Capacity	2.8kgf		
Parallelism	60μm		
Driving Parallelism	20μm		
Orthogonality	10μm		
Weight	0.22 kg	0.22 kg	0.20 kg
Material	Aluminum		
Finish Treatment	Black Anodizing		

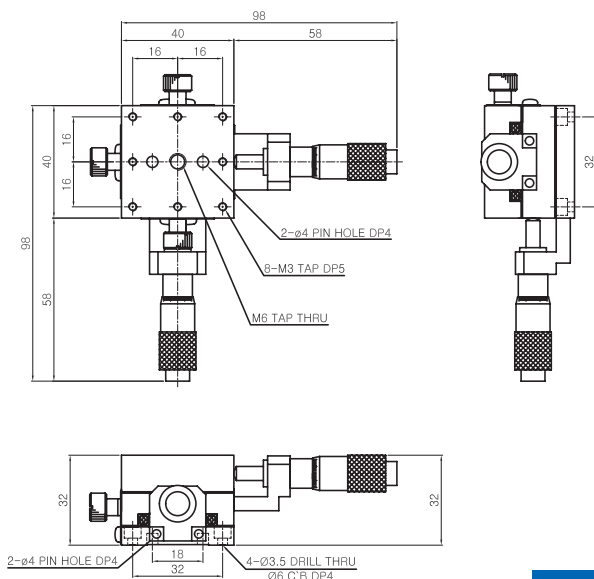



JCXY-40CS

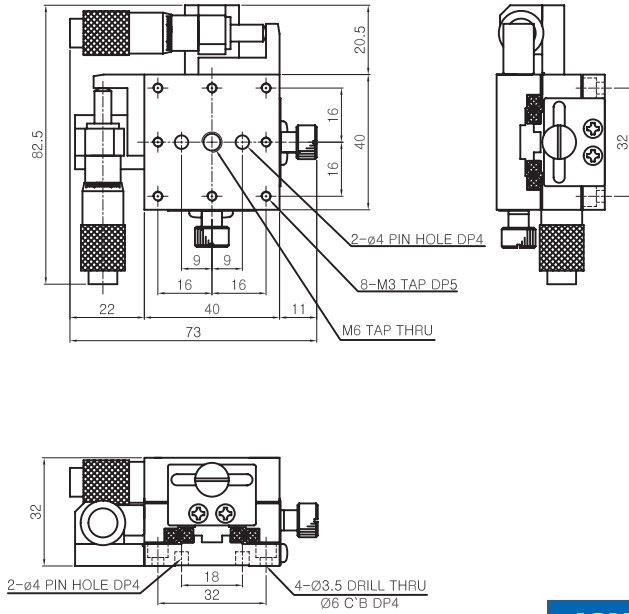

JCXY-40LS

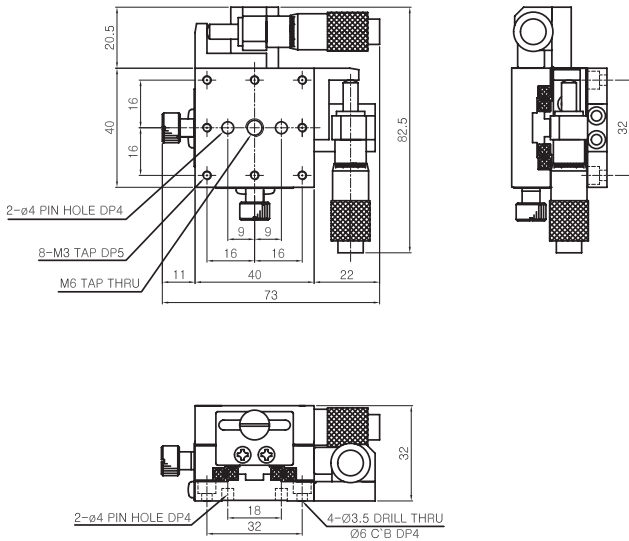



JCXY-40RS

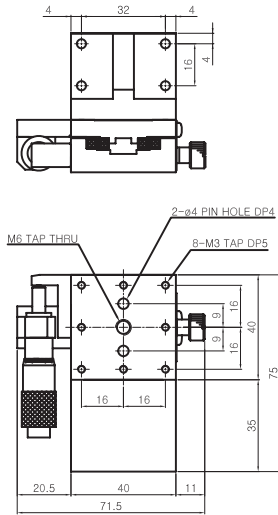

JCZ-40LZ

D

JCZ-40L

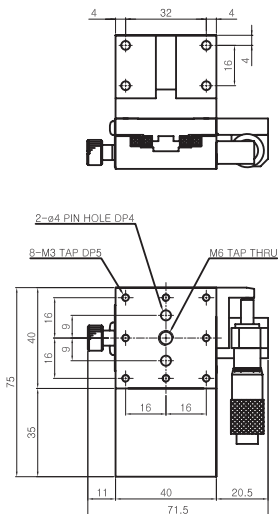

JCZ-40RZ

JCZ-40R


JCXYZ-Series(Aluminum Body)

JCXYZ-40



JCXYZ-40C

JCXYZ-40L




JCXYZ-40R

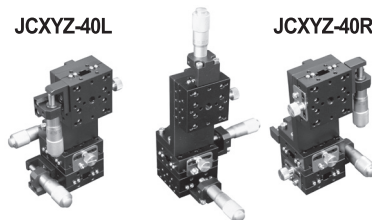




Assembling Model	JCXYZ-40L	JCXYZ-40R	JCXYZ-40C
Orthogonality	JCXY-40L + JCZ-40L	JCXY-40R + JCZ-40R	JCXY-40C + JCZ-40C
Surface Size	40 x 40 mm		
Position of Micrometer Head	Left	Right	Center
Travel Range	± 6.5 mm		
Minimum Reading of Micrometer	10 μ m		
Guide Type	Crossed Roller Guide		
Load Capacity	1.5kgf		
Parallelism	90 μ m		
Driving Parallelism	30 μ m		
Weight	0.48 kg	0.48 kg	0.45 kg
Material	Aluminum		
Finish Treatment	Black Anodizing		

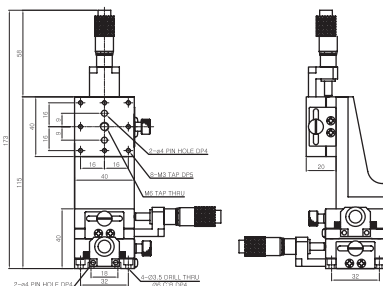

JCXYZ-40C

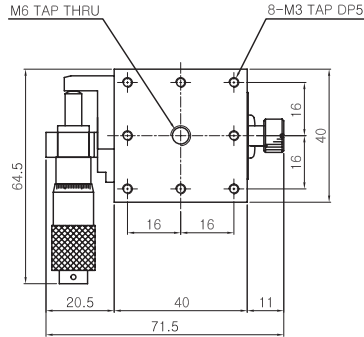

JX-40L

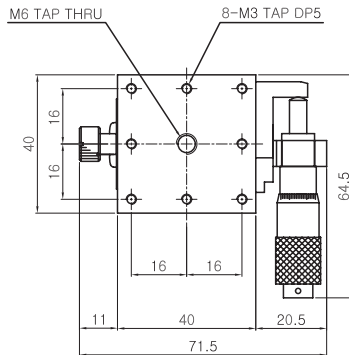


JX-40R


JXY-Series(Steel Body)

JXY-40


JXY-40L






JXY-40C





JXY-40R





Model	JXY-40L	JXY-40R	JXY-40C
Surface Size	40 x 40 mm		
Position of Micrometer Head	Left	Right	Center
Travel Range	± 6.5 mm		
Minimum Reading of Micrometer	10 μ m		
Guide Type	Linear Ball Guide		
Load Capacity	6.7kgf		
Parallelism	30 μ m		
Driving Parallelism	15 μ m		
Orthogonality	10 μ m		
Weight	0.42 kg	0.42 kg	0.42 kg
Material	Steel		
Finish Treatment	Electroless Nickel Plating		



JXY-40C

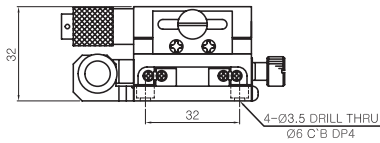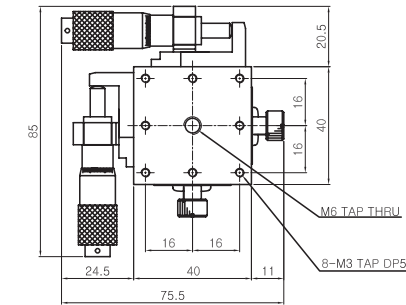

JXY-40L

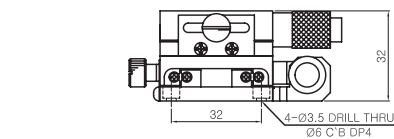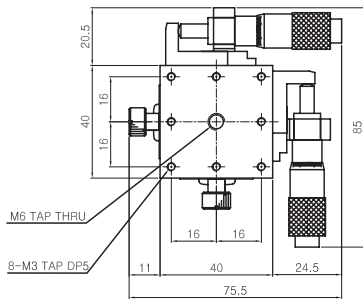


JXY-40R

Slim JXY-Series(Steel Body)

JXY-40-S

JXY-40L-S




JXY-40C-S



JXY-40R-S




Model	JXY-40LS	JXY-40RS	JXY-40CS
Surface Size	40 x 40 mm		
Position of Micrometer Head	Left	Right	Center
Travel Range	± 6.5 mm		
Minimum Reading of Micrometer	10 μ m		
Guide Type	Linear Ball Guide		
Load Capacity	7kgf		
Parallelism	30 μ m		
Driving Parallelism	15 μ m		
Orthogonality	10 μ m		
Weight	0.35 kg	0.35 kg	0.35 kg
Material	Steel		
Finish Treatment	Electroless Nickel Plating		

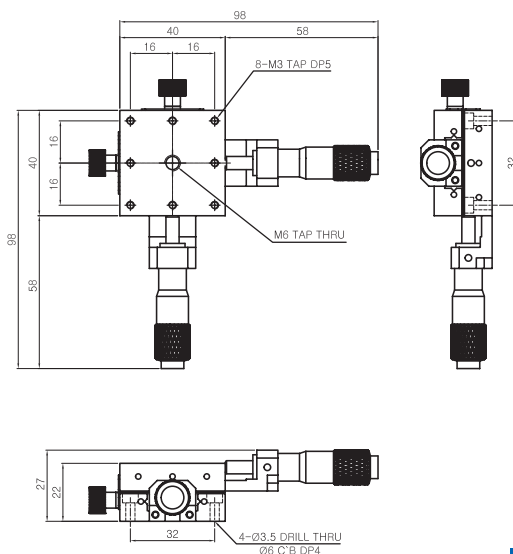





JXY-40CS

JZ-Series(Steel Body)





JZ-40

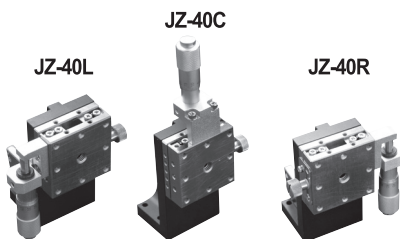

Model	JZ-40L	JZ-40R	JZ-40C
Surface Size	40 x 40 mm		
Position of Micrometer Head	Left	Right	Center
Travel Range	±6.5 mm		
Minimum Reading of Micrometer	10μm		
Guide Type	Linear Ball Guide		
Load Capacity	3.5kgf		
Parallelism	40μm		
Driving Parallelism	25μm		
Weight	0.31 kg	0.31 kg	0.30 kg
Material	Steel		
Finish Treatment	Electroless Nickel Plating		







JZ-40C



JZ-40LZ




D

JZ-40L






JZ-40RZ

JZ-40R



JXYZ-40L



JXYZ-40R