



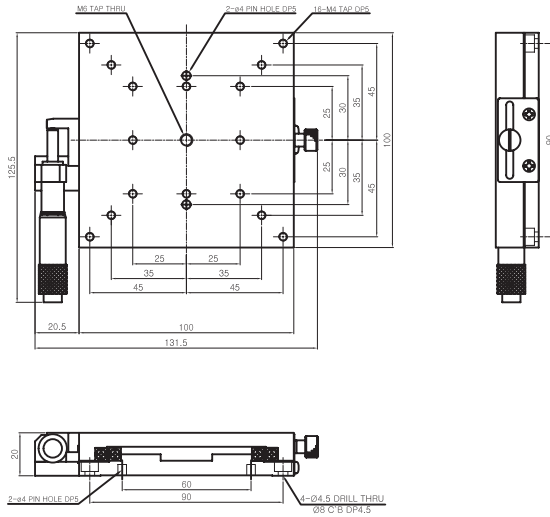

JCX-100L-25

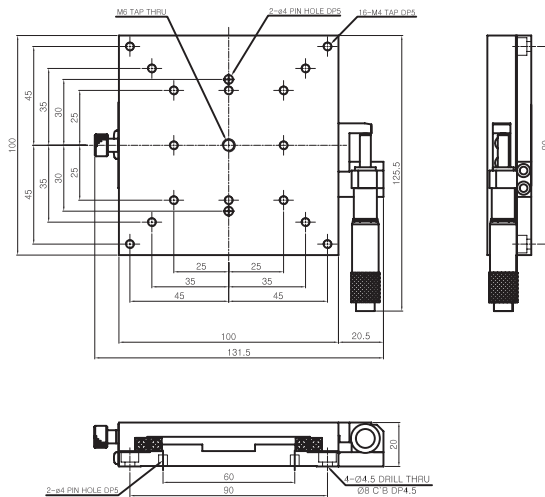


JCX-100R-25


JCX-Series(Aluminum Body)

JCX-100-50


JCX-100L-50




JCX-100C-50






JCX-100R-50






Model	JCX-100L-50	JCX-100R-50	JCX-100C-50
Surface Size	100 x 100mm		
Position of Micrometer Head	Left	Right	Center
Travel Range	±25mm		
Minimum Reading of Micrometer	10 μm		
Guide Type	Crossed-Roller Guide		
Load Capacity	15Kgf		
Parallelism	60 μm		
Driving Parallelism	20 μm		
Weight	1.2Kg	1.2Kg	1.15Kg
Material	Aluminum		
Finish Treatment	Black Anodizing		

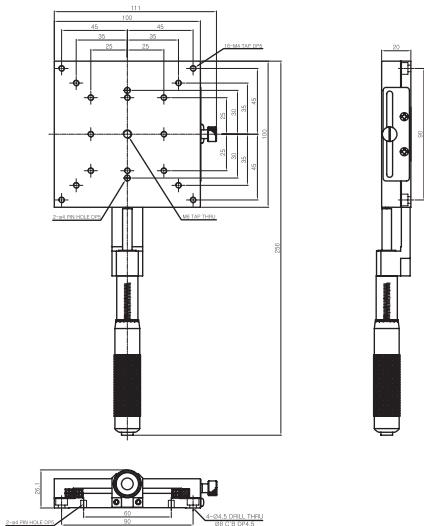

JCX-100C-50

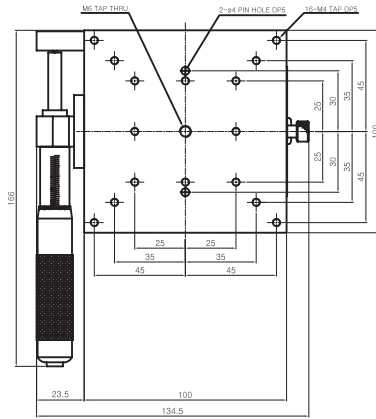

JCX-100L-50

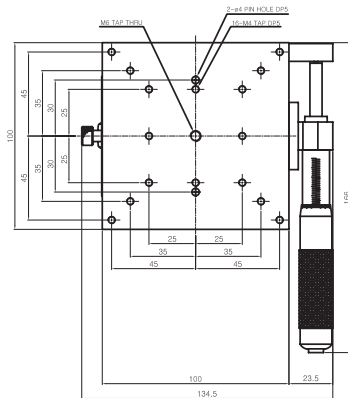

JCX-100R-50

JCX-Series(Aluminum Body)

JCXY-100-25




JCXY-100L-25

JCXY-100C-25




JCXY-100R-25






Model	JCXY-100L-25	JCXY-100R-25	JCXY-100C-25
Surface Size	100 x 100mm		
Position of Micrometer Head	Left	Right	Center
Travel Range	$\pm 12.5\text{mm}$		
Minimum Reading of Micrometer	$10\text{ }\mu\text{m}$		
Guide Type	Crossed-Roller Guide		
Load Capacity	14Kgf		
Parallelism	$60\text{ }\mu\text{m}$		
Driving Parallelism	$20\text{ }\mu\text{m}$		
Weight	2.4Kg	2.4Kg	2.3Kg
Material	Aluminum		
Finish Treatment	Black Anodizing		

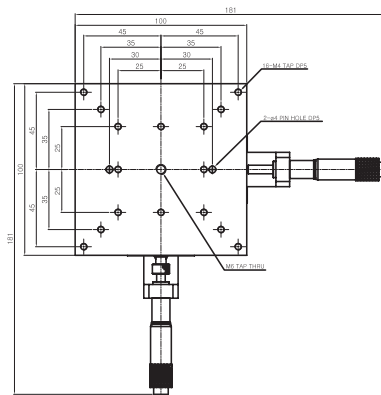



JCXY-100C-25

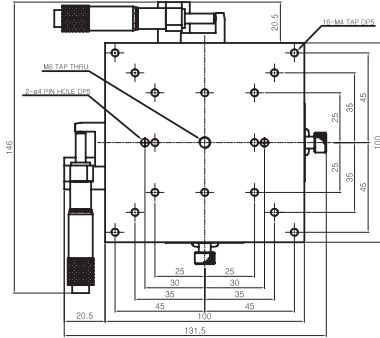



JCXY-100L-25

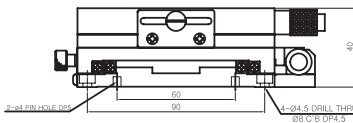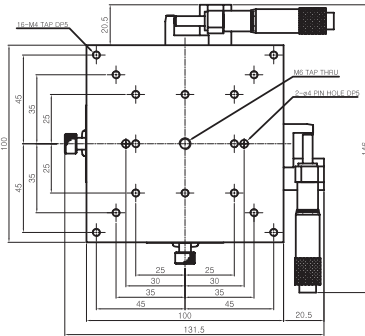

JCXY-100R-25

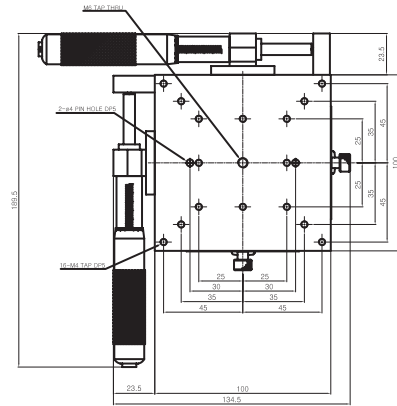

JCXY-100L-50

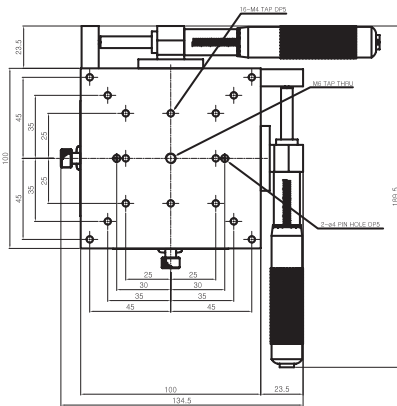

JCXY-100R-50