

JCX-Series(Aluminum Body)

JCX-25

JCX-25L





JCX-25C



JCX-25R




Model	JCX-25L	JCX-25R	JCX-25C
Surface Size	25 x 25 mm		
Position of Micrometer Head	Left	Right	Center
Travel Range	± 3.25 mm		
Minimum Reading of Micrometer	10 μ m		
Guide Type	Crossed-Roller Guide		
Load Capacity	1kgf		
Parallelism	30 μ m		
Driving Parallelism	10 μ m		
Weight	0.04 kg	0.04 kg	0.04 kg
Material	Aluminum		
Finish Treatment	Black Anodizing		

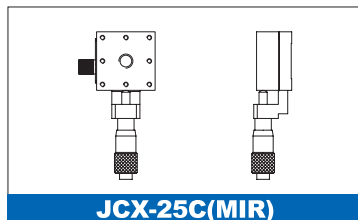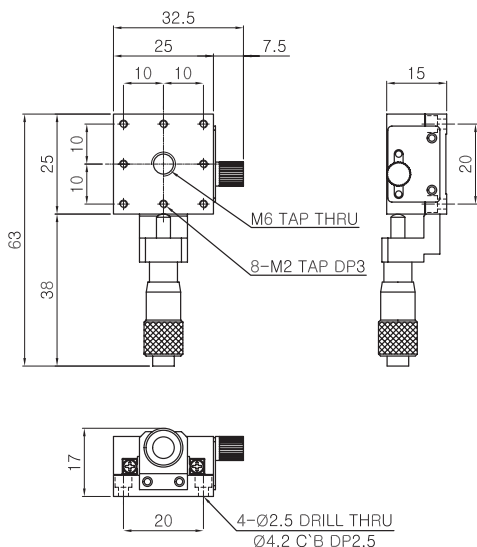


JCX-25C(MIR)

JCX-25C

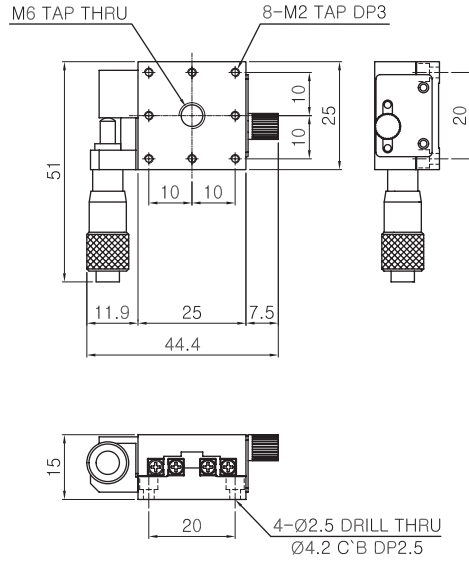

D


JCX-25L

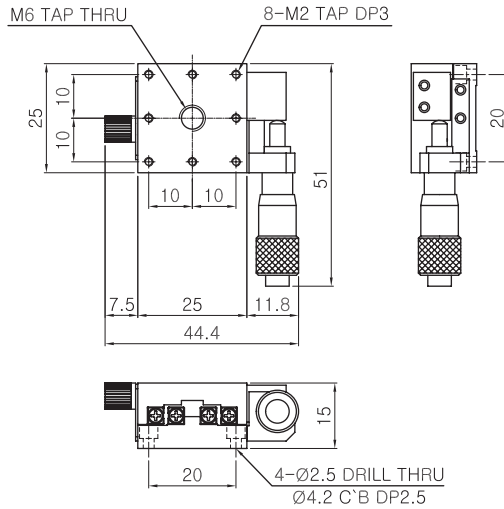


JCX-25R

JCXY-Series(Aluminum Body)


JCXY-25

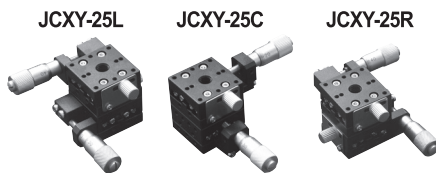


Model	JCXY-25L	JCXY-25R	JCXY-25C
Surface Size	25 x 25 mm		
Position of Micrometer Head	Left	Right	Center
Travel Range	± 3.25 mm		
Minimum Reading of Micrometer	10 μ m		
Guide Type	Crossed-Roller Guide		
Load Capacity	0.95kgf		
Parallelism	60 μ m		
Driving Parallelism	20 μ m		
Orthogonality	10 μ m		
Weight	0.08 kg	0.08 kg	0.08 kg
Material	Aluminum		
Finish Treatment	Black Anodizing		

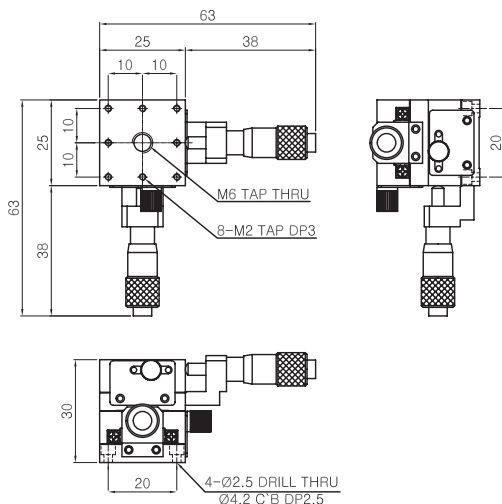

JCXY-25C

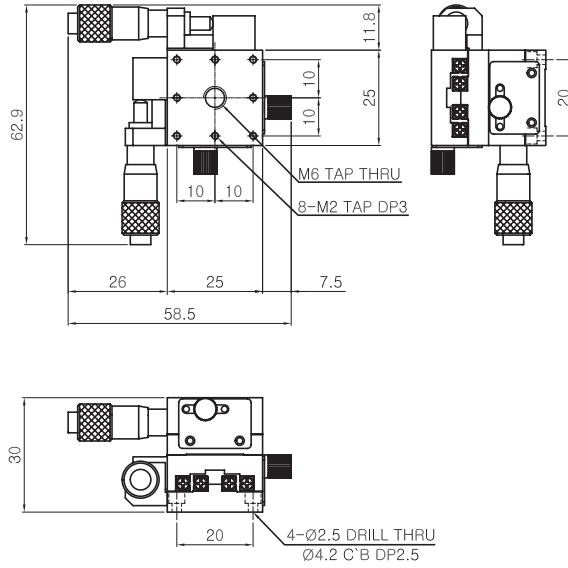

JCXY-25L

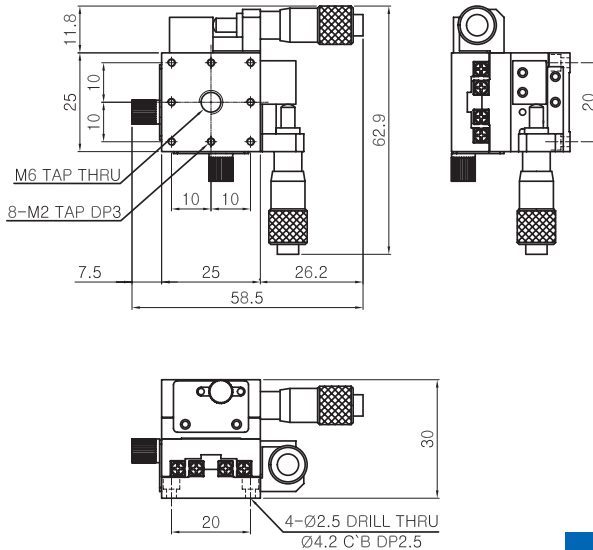

JCXY-25R


JCZ-Series(Aluminum Body)

JCZ-25





JCZ-25L

JCZ-25C


JCZ-25R

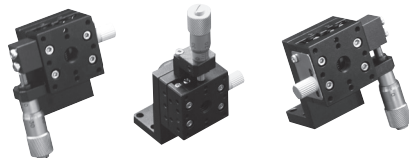


Model	JCZ-25L	JCZ-25R	JCZ-25C
Surface Size	25 x 25 mm		
Position of Micrometer Head	Left	Right	Center
Travel Range	± 3.25 mm		
Minimum Reading of Micrometer	10 μ m		
Guide Type	Crossed-Roller Guide		
Load Capacity	0.5 kgf		
Parallelism	50 μ m		
Driving Parallelism	20 μ m		
Weight	0.06 kg	0.06 kg	0.06 kg
Material	Aluminum		
Finish Treatment	Black Anodizing		



JCZ-25C

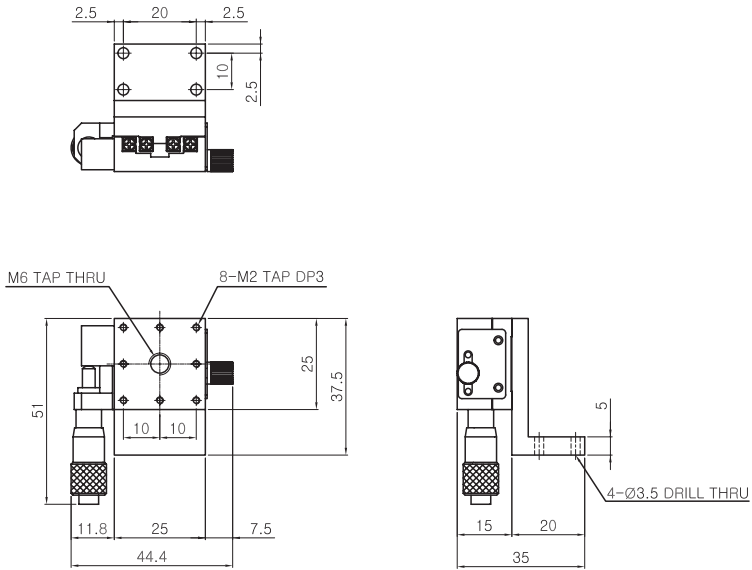


JCZ-25L

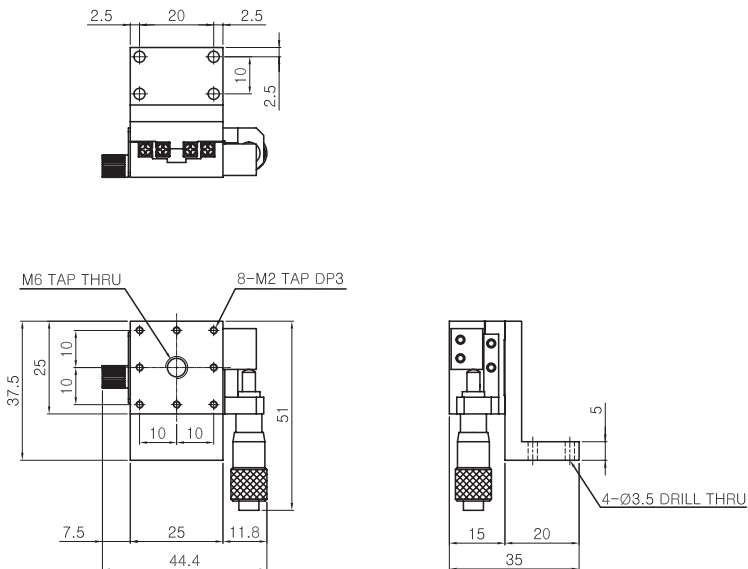




JCZ-25R

JCXYZ-25




JCXYZ-25L JCXYZ-25C JCXYZ-25R

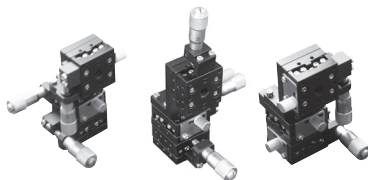




Assembling Model	JCXYZ-25L	JCXYZ-25R	JCXYZ-25C
Orthogonality	JCXY-25L + JCZ-25L	JCXY-25R + JCZ-25R	JCXY-25C + JCZ-25C
Surface Size	25 x 25 mm		
Position of Micrometer Head	Left	Right	Center
Travel Range	±3.25 mm		
Minimum Reading of Micrometer	10μm		
Guide Type	Crossed Roller Guide		
Load Capacity	0.5kgf		
Parallelism	80μm		
Driving Parallelism	25μm		
Weight	0.14 kg	0.14 kg	0.13 kg
Material	Aluminum		
Finish Treatment	Black Anodizing		



JCXYZ-25C



JCXYZ-25L




JCXYZ-25R




D

JX-Series(Steel Body)

JX-25

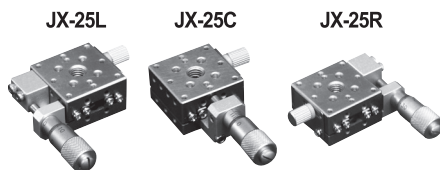




Model	JX-25L	JX-25R	JX-25C
Surface Size	25 x 25 mm		
Position of Micrometer Head	Left	Right	Center
Travel Range	± 3.25 mm		
Minimum Reading of Micrometer	10 μ m		
Guide Type	Linear Ball guide		
Load Capacity	1.2 kgf		
Parallelism	30 μ m		
Driving Parallelism	10 μ m		
Weight	0.06 kg	0.06 kg	0.06 kg
Material	Steel		
Finish Treatment	Electroless Nickel Plating		

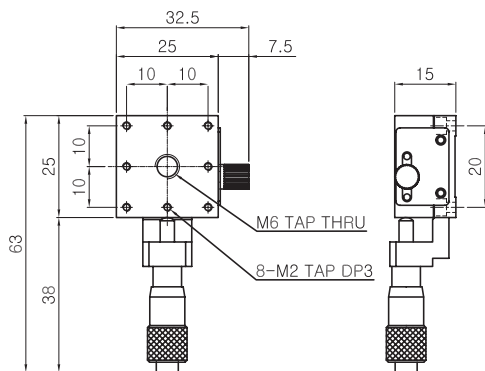

JX-25C(MIR)




JX-25C

M6 TAP THRU 8-M2 TAP DP3

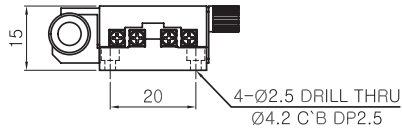

JX-25L

M6 TAP THRU 8-M2 TAP DP3



JX-25R


JX-Series(Steel Body)

JXY-25


JXY-25L

JXY-25C


JXY-25R

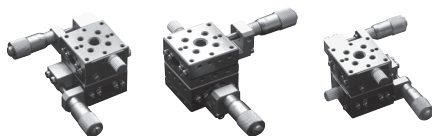


Model	JXY-25L	JXY-25R	JXY-25C
Surface Size	25 x 25 mm		
Position of Micrometer Head	Left	Right	Center
Travel Range	± 3.25 mm		
Minimum Reading of Micrometer	10 μ m		
Guide Type	Linear Ball Guide		
Load Capacity	1 kgf		
Parallelism	60 μ m		
Driving Parallelism	20 μ m		
Weight	0.12 kg	0.12 kg	0.12 kg
Material	Steel		
Finish Treatment	Electroless Nickel Plating		

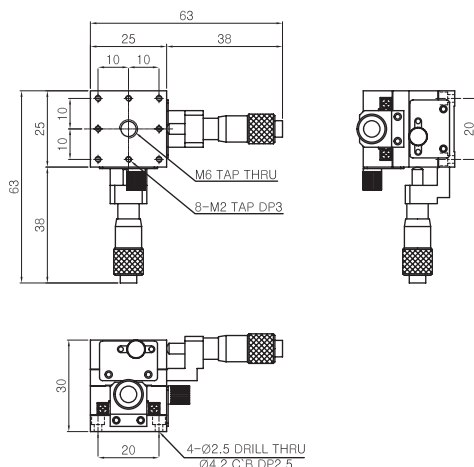

JXY-25C

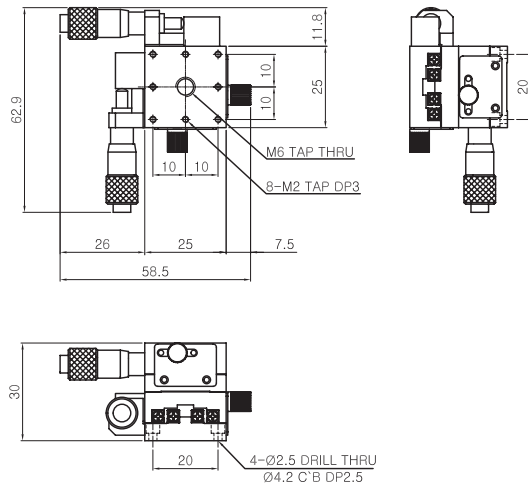

JXY-25L

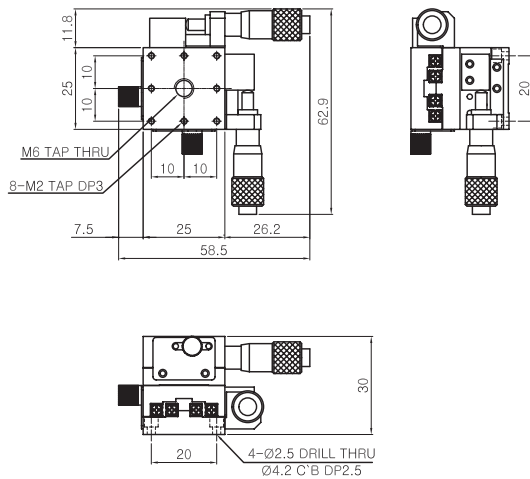


JXY-25R

JX-Series(Steel Body)

JZ-25


JZ-25L







JZ-25C






JZ-25R






Model	JZ-25L	JZ-25R	JZ-25C
Surface Size	25 x 25 mm		
Position of Micrometer Head	Left	Right	Center
Travel Range	± 3.25 mm		
Minimum Reading of Micrometer	10 μ m		
Guide Type	Linear Ball Guide		
Load Capacity	0.7kgf		
Parallelism	50 μ m		
Driving Parallelism	20 μ m		
Weight	0.08 kg	0.06 kg	0.08 kg
Material	Steel		
Finish Treatment	Electroless Nickel Plating		



JZ-25C



JZ-25L



JZ-25R


JXYZ-Series(Steel Body)

JXYZ-25




JXYZ-25L

JXYZ-25C




JXYZ-25R

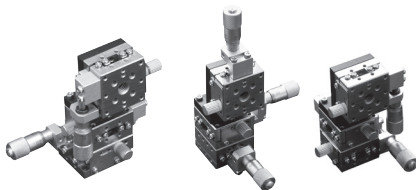




Assembling Model	JXYZ-25L	JXYZ-25R	JXYZ-25C
Orthogonality	JXY-25L + JZ-25L	JXY-25R + JZ-25R	JXY-25C + JZ-25C
Surface Size	25 x 25 mm		
Position of Micrometer Head	Left	Right	Center
Travel Range	± 3.25 mm		
Minimum Reading of Micrometer	10 μ m		
Guide Type	Linear Ball Guide		
Load Capacity	0.7kgf		
Parallelism	60 μ m		
Driving Parallelism	20 μ m		
Weight	0.2 kg	0.2 kg	0.2 kg
Material	Steel		
Finish Treatment	Electroless Nickel Plating		



JXYZ-25C



JXYZ-25L



JXYZ-25R