

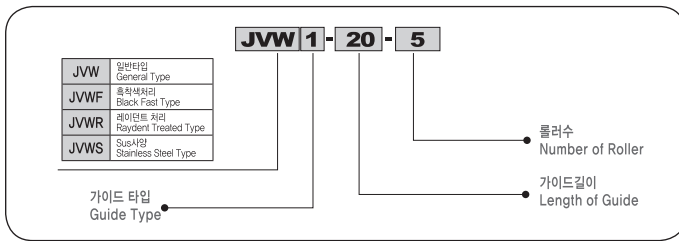


JVW 1

와이드 타입, 크로스 롤러 슬라이드 가이드
Wide Type, Crossed-Roller Slide Guide

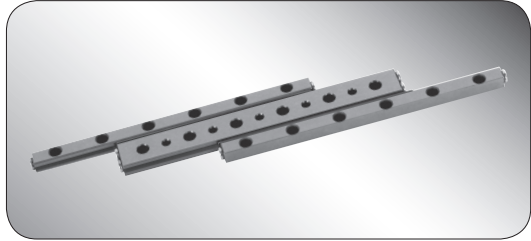

Specification Model	스트로크 Stroke	D _a	롤러수 The number of roller Z	주요치수						
				Lo	H	t	B	B ₁	I	Q
JVW 1 - 20 - 5	12	1.5	5	20	4.5	0.5	17	7.6	3.8	13.4
JVW 1 - 30 - 7	22		7	30						
JVW 1 - 40 - 10	27		10	40						
JVW 1 - 50 - 13	32		13	50						
JVW 1 - 60 - 16	37		16	60						
JVW 1 - 70 - 19	42		19	70						
JVW 1 - 80 - 21	52		21	80						

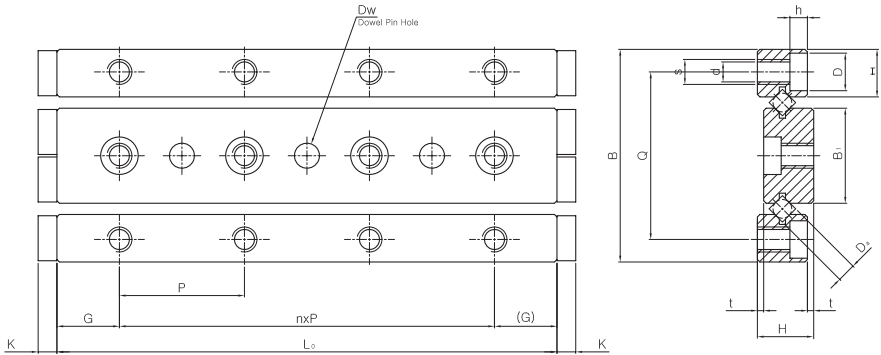



(Unit : mm)

Main Dimension								기본정격하중 Basic Proper Load		질량(레일) Weight of Rail
n x P	G	S	d	D	h	K	Dw	Cz KN	Coz KN	Kg/m
1 x 10	5	M2 x 0.4	1.65	3	1.4	1.5	2 + 0.020	34	31	0.46
2 x 10								46	47	
3 x 10								68	78	
4 x 10								78	94	
5 x 10								96	125	
6 x 10								105	140	
7 x 10								114	156	


1KN = 102kgf

JVW 2

와이드 타입, 크로스 롤러 슬라이드 가이드
Wide Type, Crossed-Roller Slide Guide

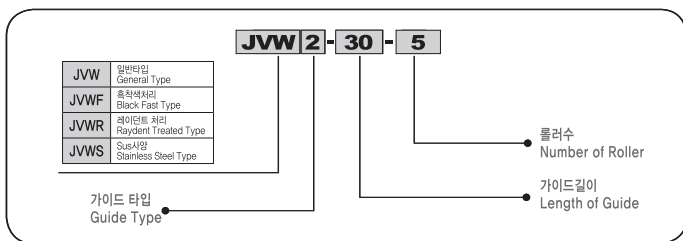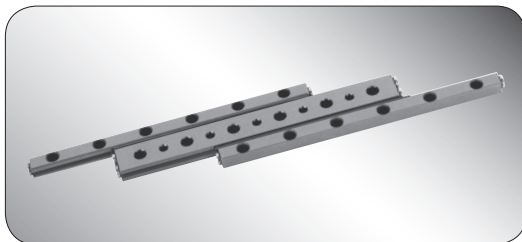

Specification Model	스트로크 Stroke	D _a	롤러수 The number of roller Z	주요치수						
				Lo	H	t	B	B ₁	I	Q
JVW 2 - 30 - 5	18	2	5	30	6.5	0.5	24	11	5.5	19
JVW 2 - 45 - 8	24		8	45						
JVW 2 - 60 - 11	30		11	60						
JVW 2 - 75 - 13	44		13	75						
JVW 2 - 90 - 16	50		16	90						
JVW 2 - 105 - 18	64		18	105						
JVW 2 - 120 - 21	70		21	120						

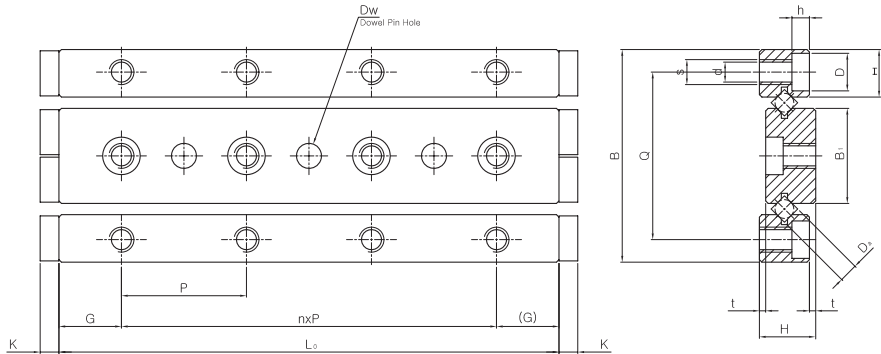



(Unit : mm)

Main Dimension								기본정격하중 Basic Proper Load		질량(레일) Weight of Rail Kg/m
n x P	G	S	d	D	h	K	D _w	C _z KN	C _{oz} KN	
1 x 15	7.5	M3 x 0.5	2.55	4.4	2	2	3 + 0.020	59	59	0.98
2 x 15								100	118	
3 x 15								118	147	
4 x 15								135	176	
5 x 15								168	235	
6 x 15								184	265	
7 x 15								199	294	


1KN = 102kgf

JVW 3

와이드 타입, 크로스 롤러 슬라이드 가이드
Wide Type, Cross-Roller Slide Guide

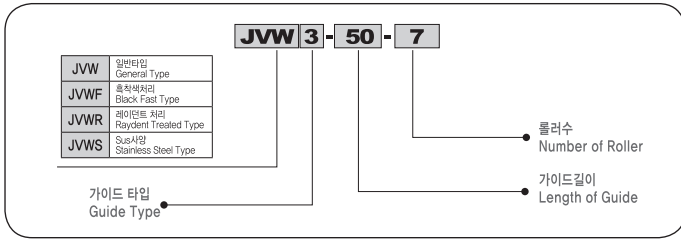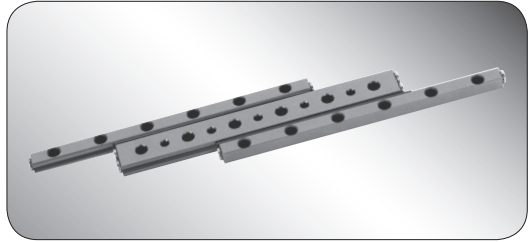

Specification Model	스트로크 Stroke	D.	롤러수 The number of roller Z	주요치수						
				Lo	H	t	B	B ₁	I	Q
JVW 3 - 50 - 7	28	3	7	50	8.5	0.5	36	16.6	8.3	29
JVW 3 - 75 - 10	48		10	75						
JVW 3 - 100 - 14	58		14	100						
JVW 3 - 125 - 17	78		17	125						
JVW 3 - 150 - 21	88		21	150						
JVW 3 - 175 - 24	108		24	175						
JVW 3 - 200 - 28	118		28	200						

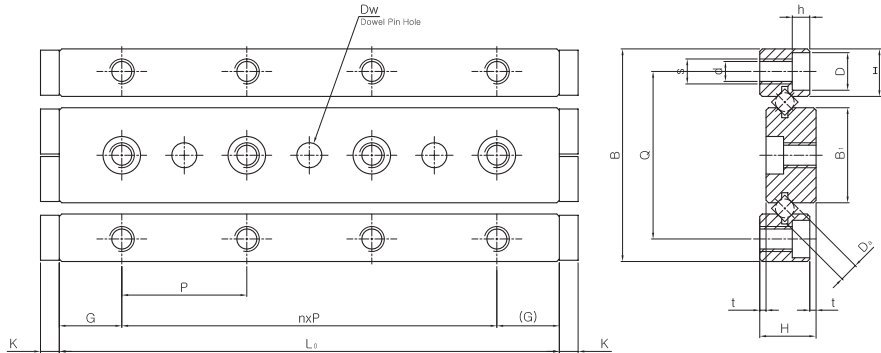



(Unit : mm)

Main Dimension								기본정격하중 Basic Proper Load	질량(레일) Weight of Rail	
n x P	G	S	d	D	h	K	D _w	C _z KN	C _{oz} KN	Kg/m
1 x 25	12.5	M4 x 0.7	3.3	6	3.1	2.5	4	180	212	1.94
2 x 25								264	353	
3 x 25								340	494	
4 x 25								376	565	
5 x 25								444	706	
6 x 25								510	847	
7 x 25								572	988	


1KN = 102kgf

JVW 4

와이드 타입, 크로스 롤러 슬라이드 가이드
Wide Type, Crossed-Roller Slide Guide

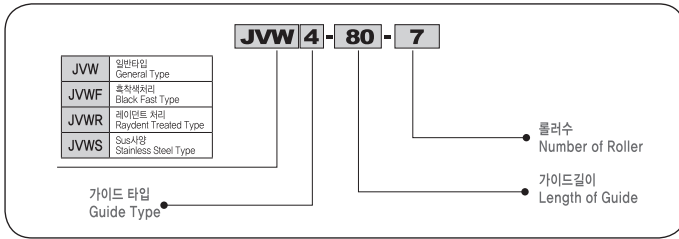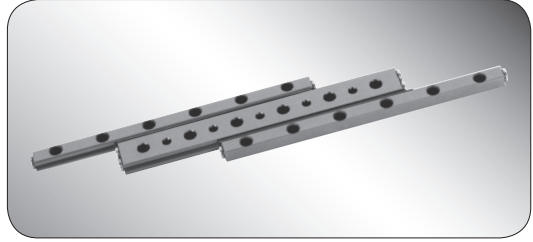

Specification Model	스โตร크 Stroke	D _s	롤러수 The number of roller Z	주요치수						
				Lo	H	t	B	B ₁	I	Q
JVW 4 - 80 - 7	58	4	7	80	11.5	0.5	44	20.4	10.2	35
JVW 4 - 120 - 11	82		11	120						
JVW 4 - 160 - 15	106		15	160						
JVW 4 - 200 - 19	130		19	200						
JVW 4 - 240 - 23	154		23	240						
JVW 4 - 280 - 27	178		27	280						

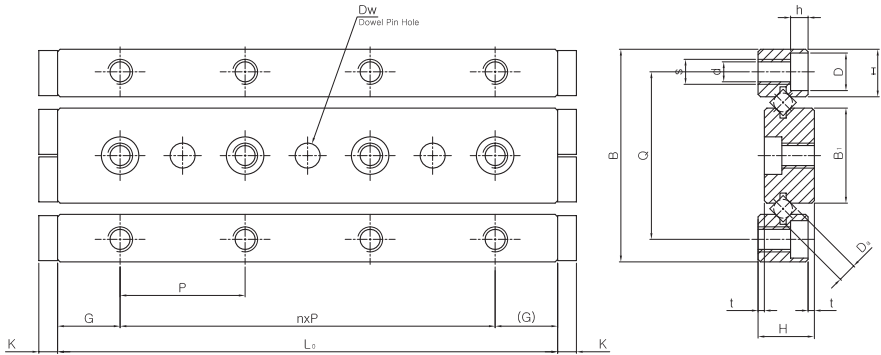

(Unit : mm)

Main Dimension								기본정격하중 Basic Proper Load		질량(레일) Weight of Rail
n x P	G	S	d	D	h	K	D _w	C _z KN	C _{oz} KN	Kg/m
1 x 40	20	M5 x 0.8	4.3	8	4.5	2.5	5	356	435	3.36
2 x 40								522	725	
3 x 40								672	1020	
4 x 40								812	1310	
5 x 40								943	1600	
6 x 40								1070	1890	

1KN = 102Kgf