


MST-K 알루미늄합금제

MSTS-K 올스테인레스제

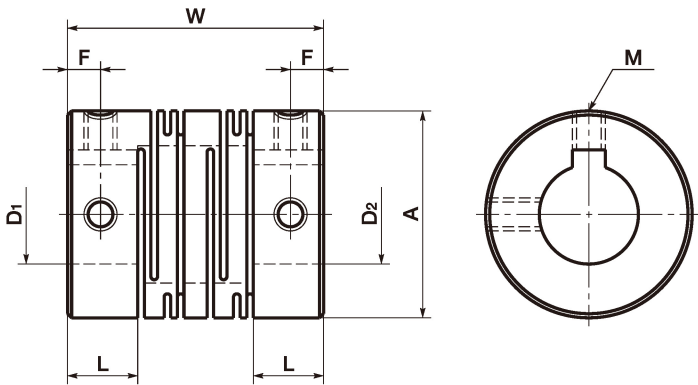

|규격

단위 : mm


품번 	A	L	W	F	M	나사체결토크 (N·m)
MST-32K	32	12	41	6	M4	1.7
MST-40K	40	17	56	8.5	M5	4
MST-50K	50	21	71	10.5	M6	7
MST-63K	63	26	90	13	M8	15
MSTS-32K	32	12	41	6	M4	1.7
MSTS-40K	40	17	56	8.5	M5	4
MSTS-50K	50	21	71	10.5	M6	7
MSTS-63K	63	26	90	13	M8	15

품번	표준축구멍지름(치수허용차H8) D ₁ ×D ₂ 		
MST-32K	12×12	14×14	
MST-40K	14×14	16×16	18×18
MST-50K	16×16	18×18	20×20
MST-63K	20×20	25×25	30×30
MSTS-32K	12×12	14×14	
MSTS-40K	14×14	16×16	18×18
MSTS-50K	16×16	18×18	20×20
MSTS-63K	20×20	25×25	

- 전상품에 육각렌치무두볼트가 포함되어 있습니다..
- 적용축지름의 추천 허용차는 h6 및 h7입니다.

단위 : mm

• 축구멍부 상세



표준축구멍지름 D	키홀				키
	b		t		
	기준 치수	허용차 (JS9)	기준 치수	허용차	b×h
12	4	±0.0150	1.8	+0.1 0	4×4
14 16	5	±0.0150	2.3	+0.1 0	5×5
18 20	6	±0.0150	2.8	+0.1 0	6×6
25 30	8	±0.0180	3.3	+0.2 0	8×7

●JIS B 1301에서 인용

| 성능

품번	최대축구멍지름 (mm)	상용토크* (N·m)	최대토크* (N·m)	최고회전수 (min ⁻¹)	관성모멘트** (kg·m ²)	정적비틀림정수 (N·m/rad)	허용편심 (mm)	허용편각 (°)	허용엔드플레이 (mm)	질량** (g)
MST-32K	14	4	8	19000	9.6×10^{-6}	500	0.15	2	±0.5	59
MST-40K	18	8	16	15000	3.2×10^{-5}	700	0.2	2	±0.5	130
MST-50K	20	16	32	12000	1.0×10^{-4}	1800	0.2	2	±0.5	270
MST-63K	30	32	64	10000	3.2×10^{-4}	3100	0.2	2	±0.5	490
MSTS-32K	14	3.5	7	19000	2.6×10^{-5}	850	0.15	2	±0.5	160
MSTS-40K	18	8	16	15000	8.6×10^{-5}	1000	0.2	2	±0.5	340
MSTS-50K	20	15	30	12000	2.8×10^{-4}	1400	0.2	2	±0.5	730
MSTS-63K	30	35	70	10000	8.5×10^{-4}	1800	0.25	2	±0.5	1300

*부하변동에 의한 상용토크·최대토크의 보정은 필요 없습니다.

**최대 축 구멍지름에서의 값입니다.

• 품번지정

MST - 32K - 12 × 12

◀1

▶2