


XHS-C

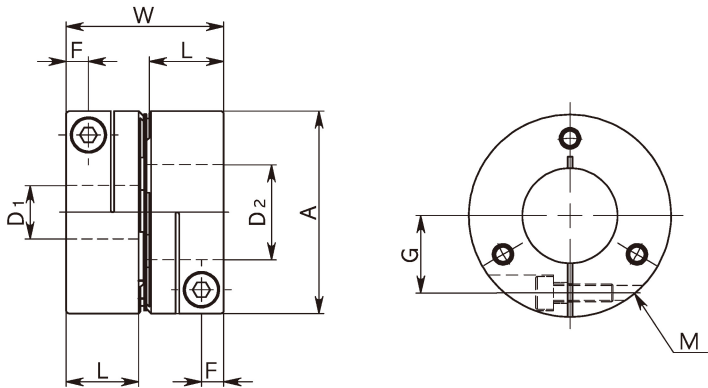

|규격

단위 : mm

품번 1	A	L	W	F	G	M	나사체결토크 (N·m)
XHS-15C	15	7.5	15.8	2.1	5	M2	0.45
XHS-19C	19	9.2	19.4	2.6	7	M2	0.5
XHS-25C	25	11	23.1	3.3	9.25	M2.5	1
XHS-27C	27	11	23.1	3.3	10.25	M2.5	1
XHS-34C	34	12.5	26.5	3.75	13	M3	1.5
XHS-39C	39	15.5	32.8	4.5	14.5	M4	3.5
XHS-44C	44	15.5	32.8	4.5	17	M4	3.5
XHS-56C	56	20.5	43.2	6	21	M5	8
XHS-64C	64	24	51.2	7	24	M6	13
XHS-79C	79	30	63.6	8.75	29	M8	28

품번	표준축구멍지름 D ₁ ×D ₂ 																											
	3	4	5	6	6 ^{.35}	8	9 ^{.525}	10	11	12	14	15	16	17	18	19	20	22	24	25	28	30	32	35	38	40	42	
XHS-15C	●	●	●	●																								
XHS-19C	●	●	●	●	●	●																						
XHS-25C		●	●	●	●	●	●	●	●	●																		
XHS-27C		●	●	●	●	●	●	●	●	●	●																	
XHS-34C			●	●	●	●	●	●	●	●	●	●	●															
XHS-39C				●	●	●	●	●	●	●	●	●	●	●	●	●	●											
XHS-44C						●	●	●	●	●	●	●	●	●	●	●	●	●										
XHS-56C						●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●							
XHS-64C								●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●				
XHS-79C											●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	

- 전상품에 육각렌치볼트가 포함되어 있습니다.
- 적용축지름의 추천치수허용차는 h6 및 h7 입니다.
- D컷축에 장착할 경우, 축의 D컷면 위치에 주의바랍니다.

| 성능

품번	최대축구멍지름 (mm)	상용토크* (N·m)	최대토크* (N·m)	최고회전수 (min ⁻¹)	관성모멘트** (kg·m ²)	정적비틀림정수 (N·m/rad)	허용편심 (mm)	허용편각 (°)	허용엔드플레이 (mm)	질량** (g)
XHS-15C	6	0.6	1.2	42000	2.2×10^{-7}	110	0.01	0.7	±0.1	6.6
XHS-19C	8	1.5	3	33000	6.3×10^{-7}	330	0.02	1	±0.1	13
XHS-25C	12	3	6	25000	2.3×10^{-6}	1200	0.02	1	±0.15	25
XHS-27C	14	3.3	6.6	23000	3.1×10^{-6}	1800	0.02	1	±0.2	27
XHS-34C	16	6.3	12.6	18000	9.2×10^{-6}	3900	0.02	1	±0.25	52
XHS-39C	20	12	24	16000	2.0×10^{-5}	6000	0.02	1	±0.25	84
XHS-44C	22	15	30	14000	3.3×10^{-5}	7900	0.02	1	±0.3	107
XHS-56C	28	37.5	75	11000	1.1×10^{-4}	14000	0.02	1	±0.35	233
XHS-64C	35	50	100	9800	2.2×10^{-4}	16000	0.02	1	±0.45	328
XHS-79C	42	100	200	7900	6.7×10^{-4}	23000	0.02	1	±0.55	748

* 부하변동에 의한 상용토크·최대토크의 보정은 필요 없습니다.

* * 최대 축 구멍지름에서의 값입니다.

• 품번지정

XHS-27C-8×10

1

2